



Ari Cotton Like

**AriPam spun fabrics for shoe lining
and ultra durable workwear**



Uv Protection




Ariteks, founded as family owned business in 1975, is the leading textile manufacturer company both in fashion and technical textiles.

By continuously developing high-end technologies it provides solutions to end users in apparel, protective workwear, functional sport, medical wear as well as technical textiles in construction and transportation industries.

As the pioneer company in special dyeing methods like indigo, vat, space-dye, coating and laminating systems, Ariteks produces highest-quality fabrics both for international and domestic markets.

Ariteks uses clean and renewable energy resources. It consumes minimum amount of water by using continuous optimised systems.

Based in 4000m² with 12 separate in house R&D laboratories, the company spends 5% of its budget for research and developing future technologies. It focuses especially on 3rd generation solar cells on flexible fabrics and biosensing textiles.

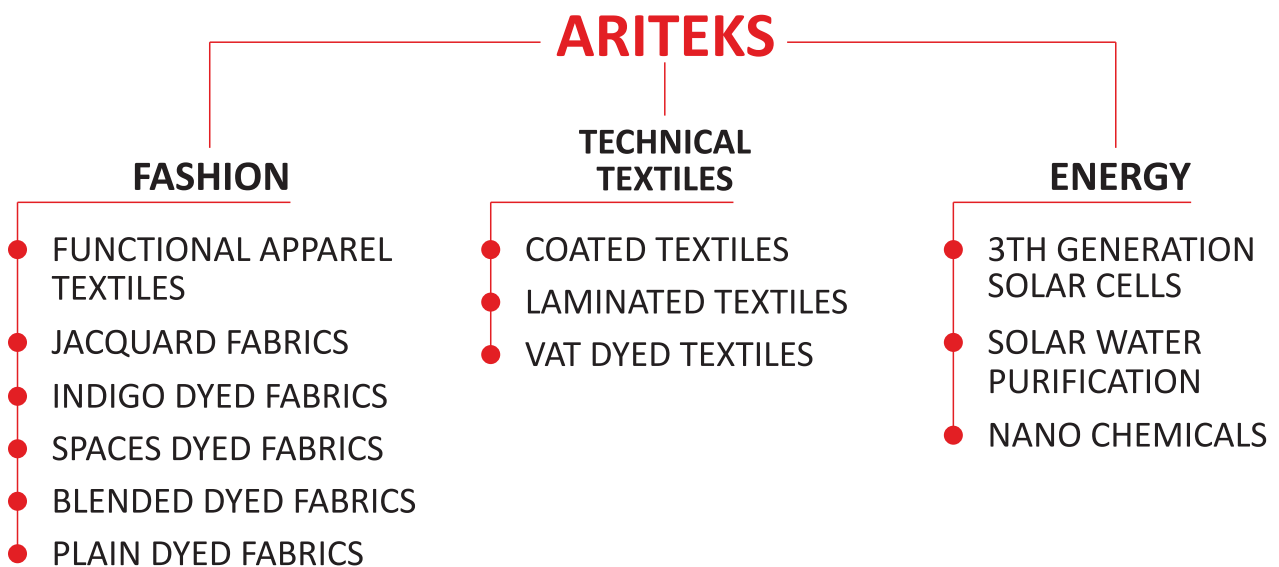

CONTENT

1	Ari Gabardin 245 245 gr/m ² , 100% AriPam, 3/1 S Twill Woven Fabric		4-5
2	Ari Gabardin 7/7 390 gr/m ² , 100% AriPam, 3/1 S Twill Woven Fabric		6-7
3	Ari Bez 180 gr/m ² , 100% AriPam, 1/1 Plain Woven Fabric		8-9
4	Ari Penye 140 gr/m ² , 100% AriPam, Jersey Knit Fabric		10-11
5	Ari Pike 210 gr/m ² , 100% AriPam, Uv protective, Pique Knit Fabric		12-13




245 gr/m², 100% AriPam,
Uv protective,
3/1 S Twill Woven Fabric



Sample



**Ari Gabardin 245 - 5469
Navy**



**Ari Gabardin 245 - 5470
Black**



**Ari Gabardin 245 - 5471
Grey**



Description

100% AriPam spun twill fabric. It is used as a lining inside of the shoes.

Ari Gabardin 245 can also be used for outdoor jackets, safety jackets, pants and trousers.

Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/2 Ne	EN ISO 2060
Weight	245 ±10 gr/m ²	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>1800N; Weft>1200N	EN ISO 13934-1
Tear Strength	Warp>35N; Weft>40N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758



390 gr/m², 100% AriPam,
Uv protective,
3/1 S Twill Woven Fabric



Sample



**Ari Gabardin 7/7 - 5927
Grey**



**Ari Gabardin 7/7 - 5926
Navy**



Description

100% AriPam spun heavy twill fabric. It is used as a lining inside of the shoes.
Ari Gabardin 7/7 can also be used for winter jackets, pants and trousers.

Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	20/2 Ne	EN ISO 2060
Weight	390 ±10 gr/m ²	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>2800N; Weft>2200N	EN ISO 13934-1
Tear Strength	Warp>55N; Weft>50N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758




180 gr/m², 100% AriPam,
Uv protective,
1/1 Plain Woven Fabric



Sample



Ari Bez - 5922
White

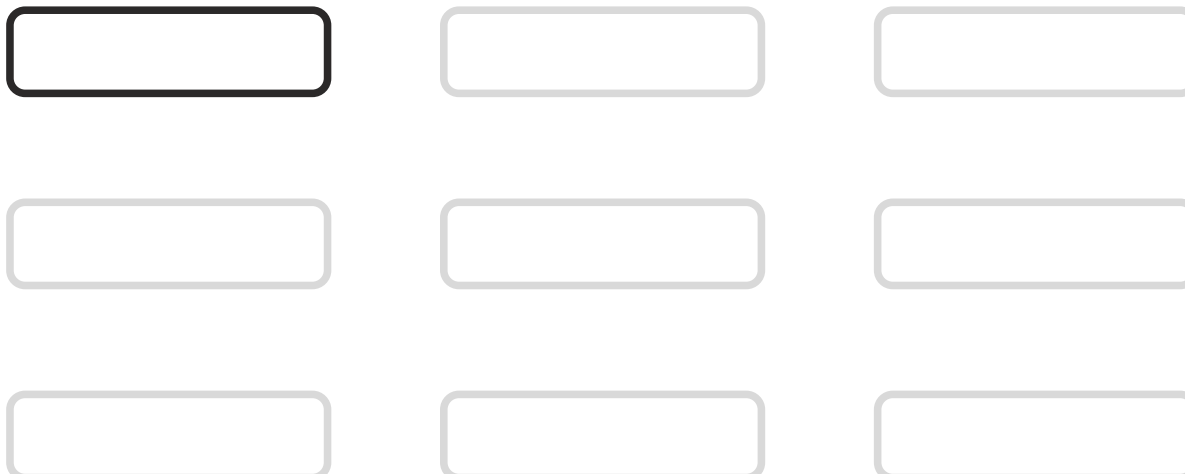

Description

100% AriPam spun plain fabric. It is used as a lining inside of the shoes.
Ari Bez can also be used on outdoor medical cloth.

Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	60/2 Ne	EN ISO 2060
Weight	180 ±10 gr/m ²	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>1000N; Weft>800N	EN ISO 13934-1
Tear Strength	Warp>25N; Weft>20N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758



140 gr/m², 100% AriPam,
Uv protective,
Jersey Knit Fabric



Sample



**Ari Penye - 5865
Grey**



**Ari Penye - 5867
Navy**



**Ari Penye - 5866
Black**



Description

100% AriPam jersey knit fabric. It is used as a lining inside of the shoes.
Ari Penye can also be used on promotional t-shirts.

Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/1 Ne	EN ISO 2060
Weight	140 ±10 gr/m ²	EN ISO 3081
Width	1700 ±20 mm	EN ISO 3932
Bursting Strength	> 1000 kPa(kN/m ²)	EN ISO 13938-1
Dimensional Change	-5%<Length<+5%;-5%<Width<+5%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758




210 gr/m², 100% AriPam,
Uv protective,
Pique Knit Fabric



Sample



**Ari Pike - 5928
Grey**

**Ari Pike - 5929
Navy**


The technical data on this guide is given for information and correct at the time of design. It can be changed without prior notice.

Description

100% AriPam pique knit fabric. It is used as a lining inside of the shoes.
Ari Pike can also be used on promotional t-shirts.

Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/1 Ne	EN ISO 2060
Weight	210 ±10 gr/m ²	EN ISO 3081
Width	1700 ±20 mm	EN ISO 3932
Bursting Strength	> 1400 kPa(kN/m ²)	EN ISO 13938-1
Dimensional Change	-5%<Length<+5%;-5%<Width<+5%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758



1975

























ARITEKS

FUNCTION FOR FLEXIBLE FABRICS

Fashion Fabrics



Technical Fabrics

  BUILDING	  HOME	  PROTECTION	  MEDICAL	  SPORT	  TRANSPORT
  GEOLOGY	  PACKAGE	  CLOTH	  AGRICULTURE	  ENVIRONMENT	  MACHINE

Headquarters

Hekimsuyu Cad. No:36
Kucukkoy/Gaziosmanpasa 34250 Istanbul/Turkey
Phone: +90 212 538 05 98-99
Fax: +90 212 537 08 46
E-Mail: support@aritekinfo.com
Web: www.aritek.net

Ariteks Fabric Factory

Address: Velimese OSB Mah.210.Sokak,
No:9/8 59930, Ergene Tekirdag/Turkey
Phone: +90 282 676 41 90
Fax: +90 282 676 46 13
E-Mail: support@aritekinfo.com
Web: www.aritek.net